


90° Пуансоны

SR.WP237.90.R06

600 kN/m max.


515 mm	17.6 kg
550 mm sections	18.8 kg

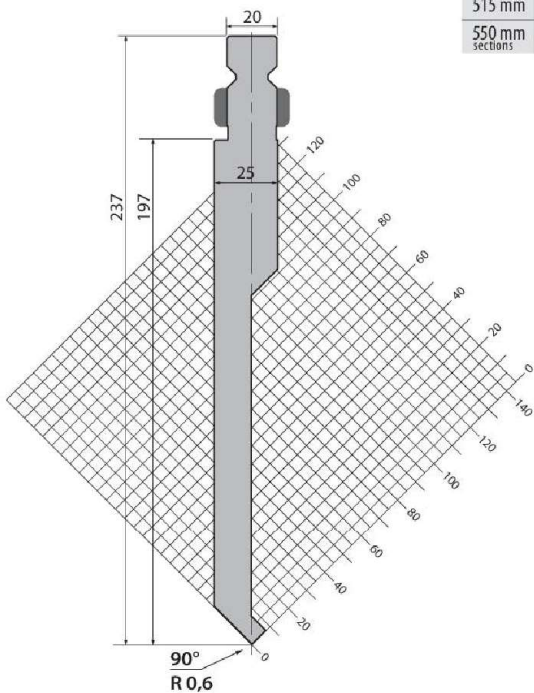

SR.WP237.90.R12

1000 kN/m max.

515 mm	19.2 kg
550 mm sections	20.5 kg

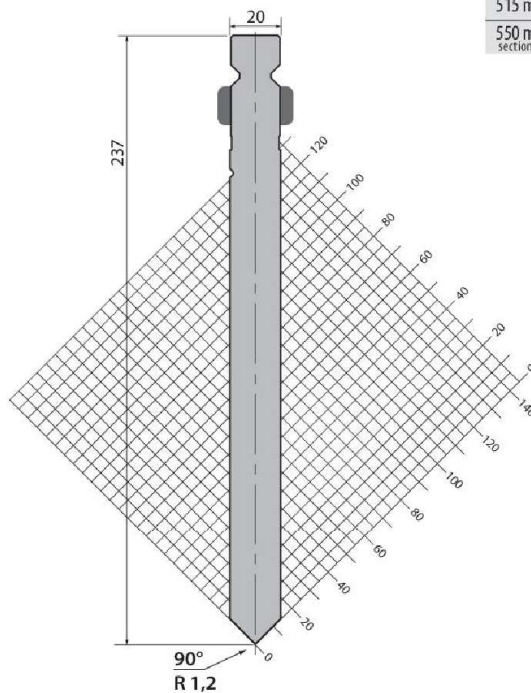


86° Пуансоны

SR.WP135.86.R1

650 kN/m max.


515 mm	12.4 kg
550 mm sections	13.2 kg

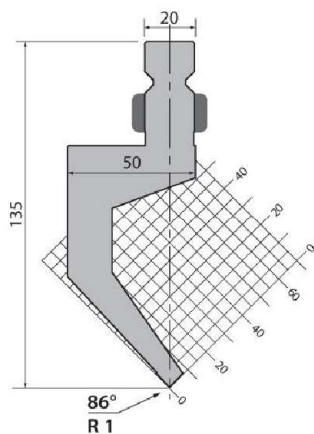

SR.WP157.86.R1

800 kN/m max.


515 mm	15.2 kg
550 mm sections	16.6 kg

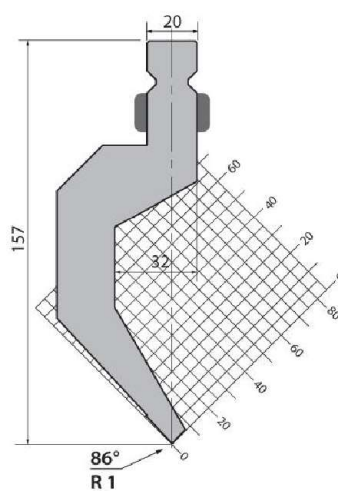

SR.WP157.86.R1S

800 kN/m max.


500 mm	12.6 kg
550 mm sections	13.8 kg

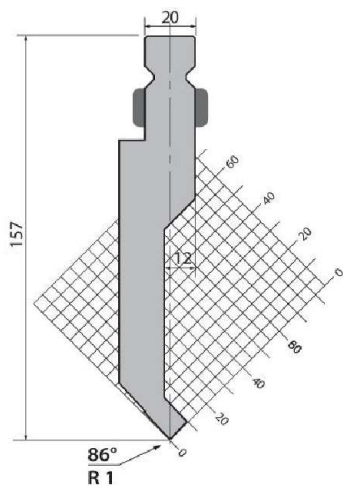

SR.WP237.86.R1

500 kN/m max.


515 mm	23.4 kg
550 mm sections	24.8 kg

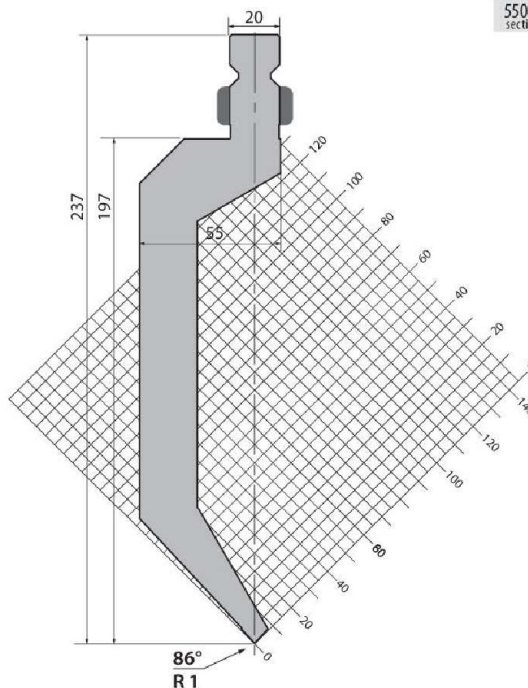

SR.WP256.86.R1

800 kN/m max.


500 mm	33.4 kg
550 mm sections	36.6 kg

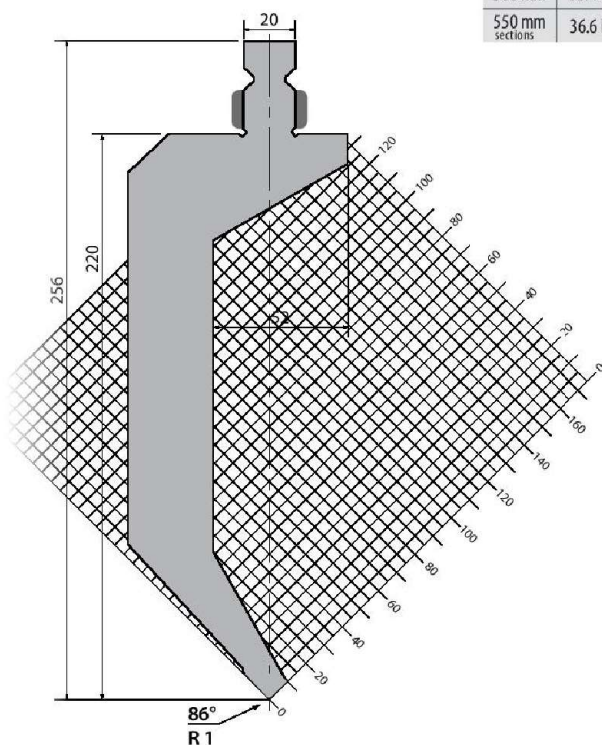

SR.WP256.86.R1S

800 kN/m max.


500 mm	28.8 kg
550 mm sections	31.6 kg

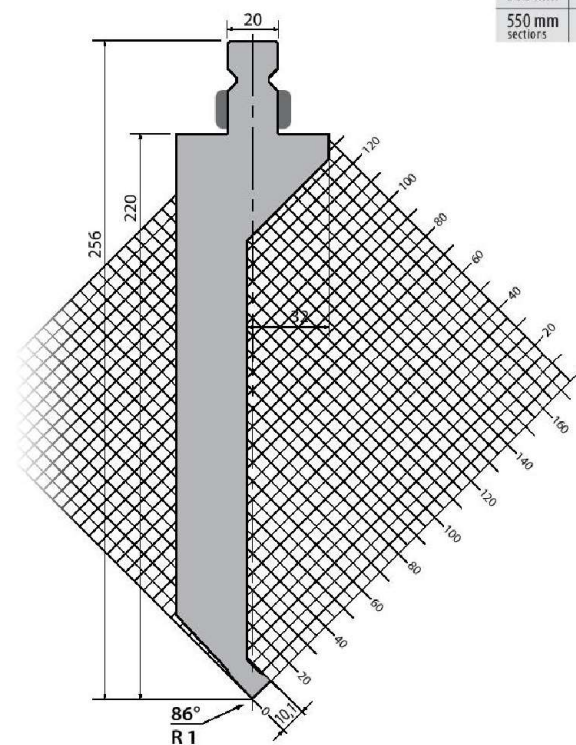

SR.WP200.80.R1

800 kN/m max.



515 mm	19.0 kg
550 mm sections	20.3 kg

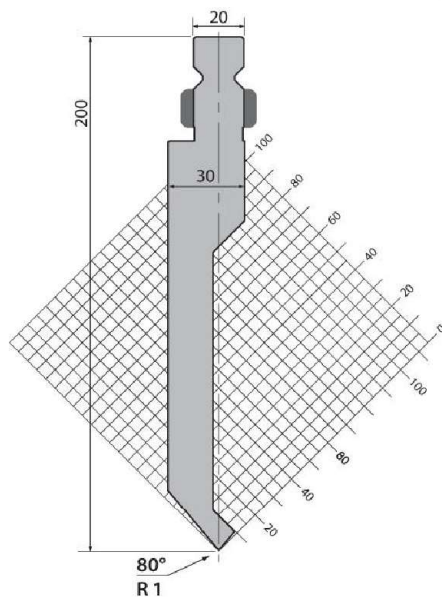

SR.WP237.80.R1

800 kN/m max.


515 mm	19.8 kg
550 mm sections	21.0 kg

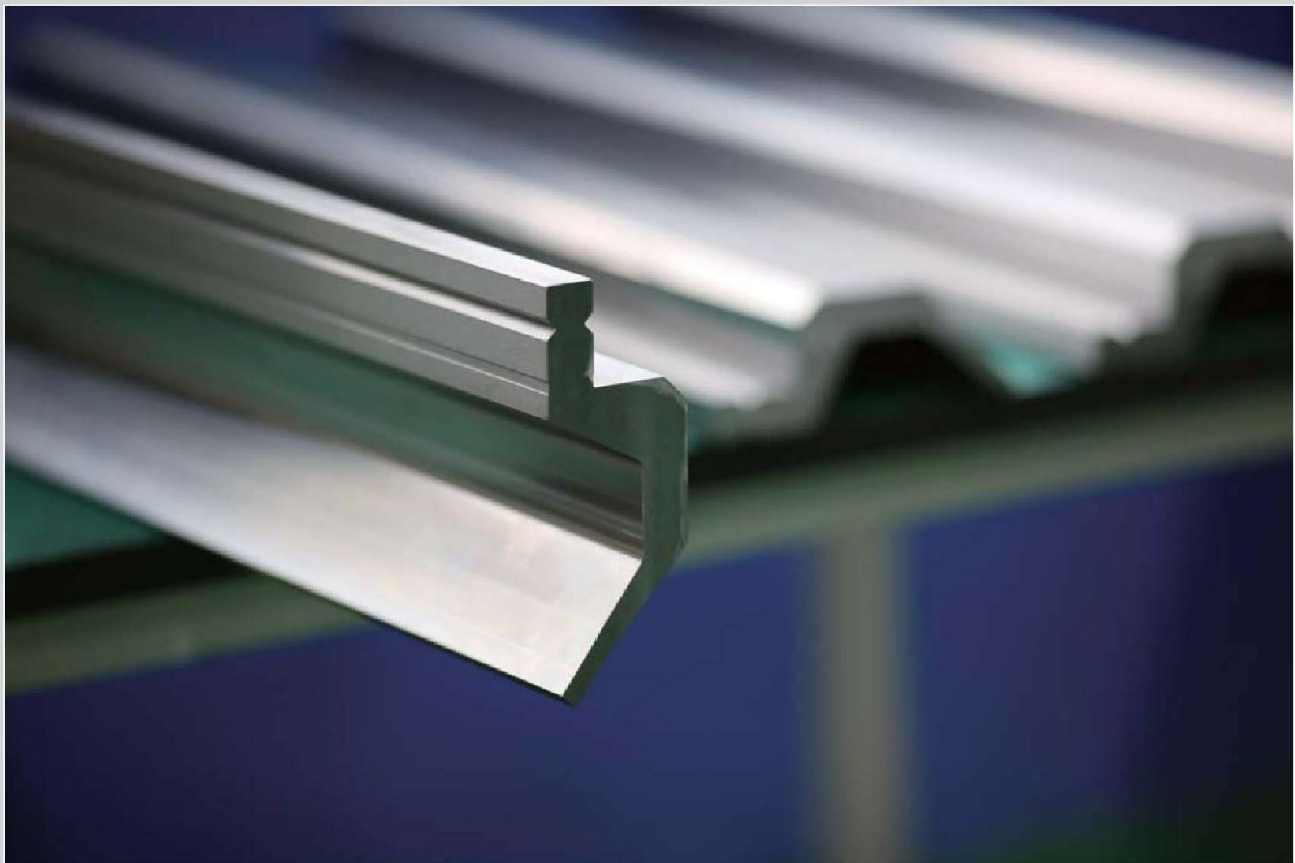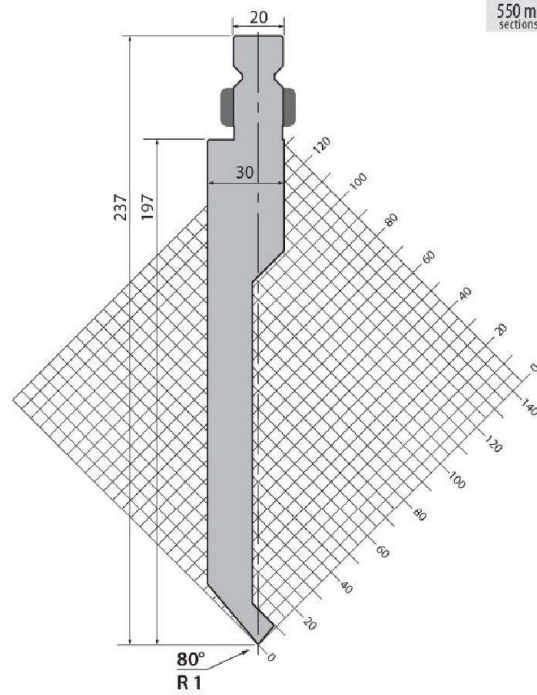

SR.WP157.60.R1

700 kN/m max.


500 mm	15.2 kg
550 mm sections	16.6 kg

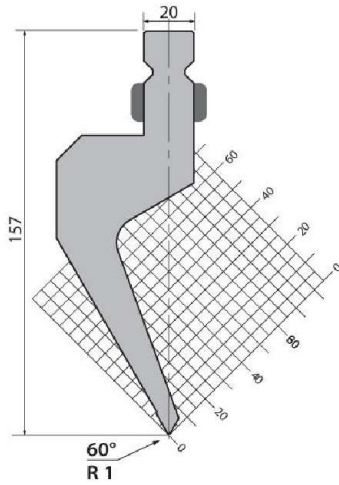

SR.WP157.60.R4

1300 kN/m max.


500 mm	12.2 kg
550 mm sections	13.4 kg

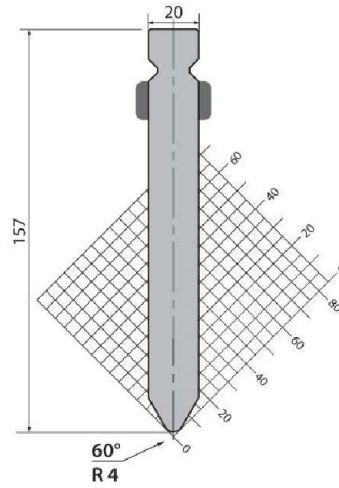

SR.WP237.60.R3

1300 kN/m max.


515 mm	18.8 kg
550 mm sections	20.2 kg

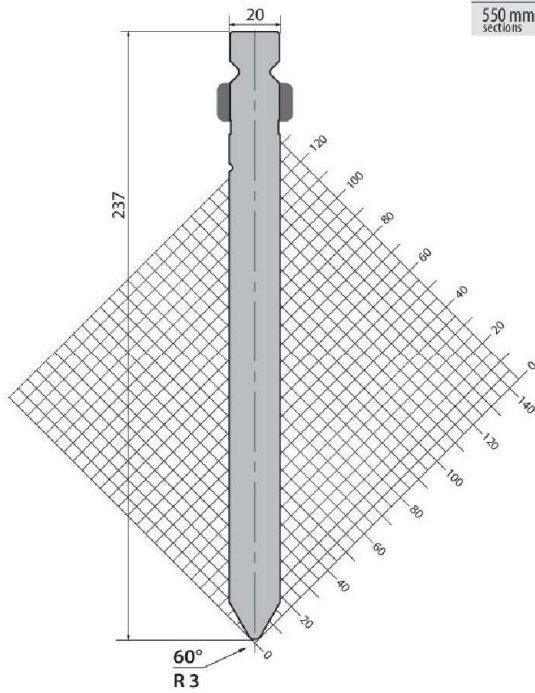

SR.WP256.60.R4

1300 kN/m max.


500 mm	26.3 kg
550 mm sections	28.9 kg

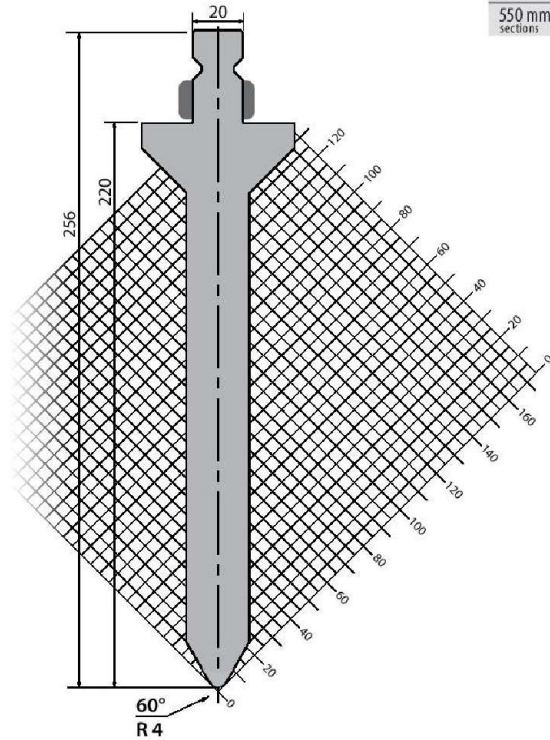

SR.WP157.28.R1

600 kN/m max.


500 mm	10.0 kg
550 mm sections	11.2 kg

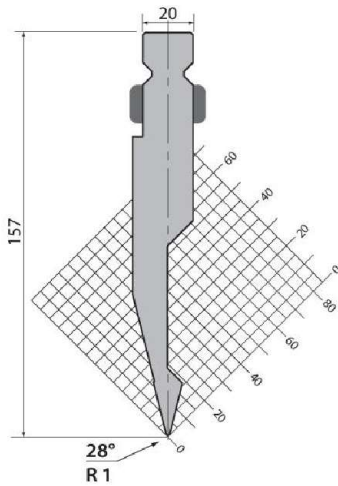

SR.WP176.28.R1

400 kN/m max.


500 mm	15.2 kg
550 mm sections	16.8 kg

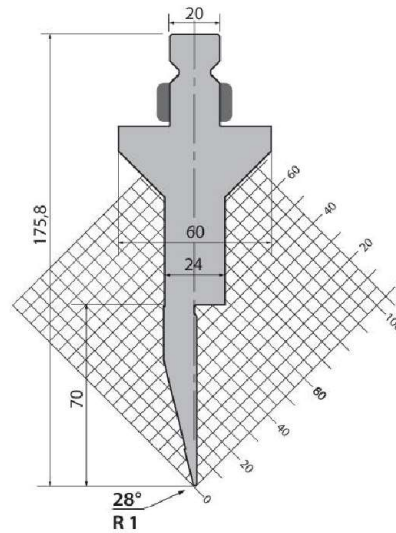

SR.WP237.28.R1

600 kN/m max.


515 mm	15.2 kg
550 mm sections	16.3 kg

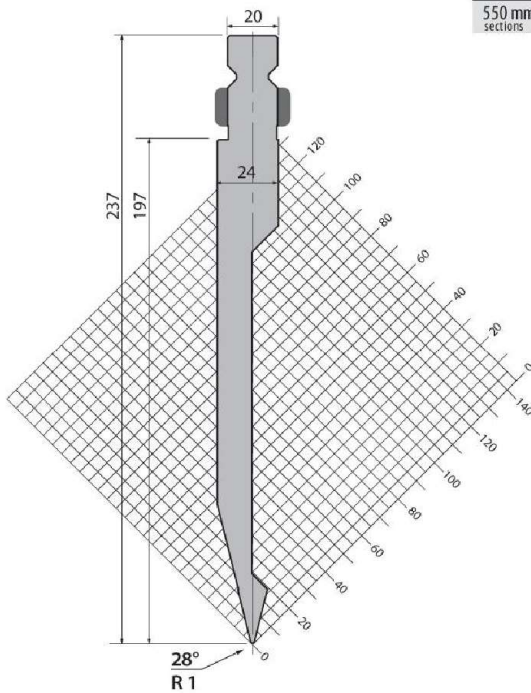

SR.WP256.28.R1

600 kN/m max.

500 mm	25.0 kg
550 mm sections	27.8 kg

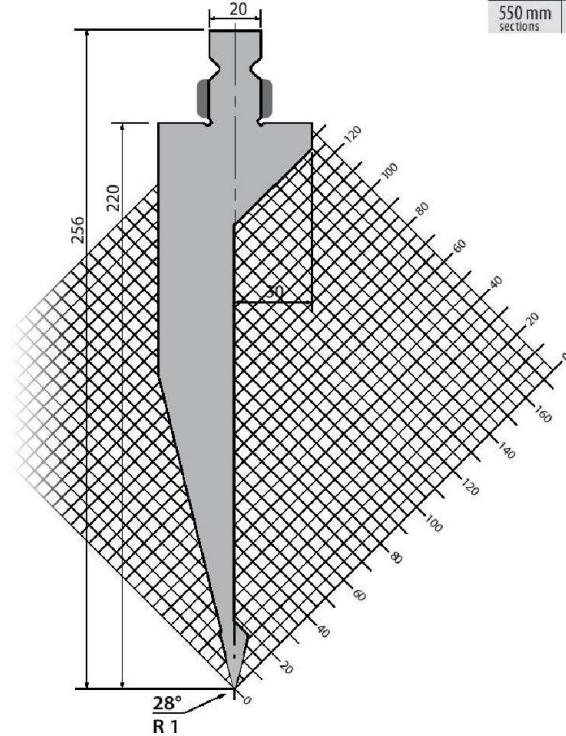

28° Пуансоны

SR.WP276.28.R1

400 kN/m max.

500 mm	24.2 kg
550 mm sections	26.6 kg

